

CERAMIC CHIP CAPACTIORS NPO (COG) DIELECTRIC

APPLICATION

NPO (COG) dielectric properties; suited for precision circuits, requiring stable dielectric characteristics:


- ◇ Negligible dependence of capacitance and dissipation factor on time, voltage, and frequency
- ◇ Low-loss (High Q)
- ◇ Predictable linear temperature coefficient
- ◇ No piezoelectric behavior

General Specification


- **Operating temperature range** : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- **Temperature coefficient**: $0 \pm 30 \text{ppm}/^{\circ}\text{C}$
- **Capacitance Range**: 0.5pF ~ 0.22uF (Test condition: $1.0 \pm 0.2 \text{Vrms}$, 1KHz, for $\leq 1000\text{pF}$ use 1 MHz)
- **Capacitance Tolerance**: Preferred $\pm 1\%$, $\pm 2\%$, $\pm 5\%$, $\pm 10\%$. (10PF < : $\pm 0.05\text{pF}$, $\pm 0.1\text{pF}$, $\pm 0.25\text{pF}$, $\pm 0.5\text{pF}$)
- **Rated Voltage**: 25VDC, 50VDC, 100VDC, 250VDC, 500VDC, 1KVDC, 2KVDC, 3KVDC
- **Q value** : $C < 30\text{pF}$: $Q \geq 400 + 20C$, $C \geq 30\text{pF}$: $Q \geq 1000$ (Test condition: 1MHz, 1KHZ for $C \geq 1000\text{pF}$, 1Vrms, 25°C)
- **Insulation resistance**: 100,000 M Ω or 1,000 Ω -F min, whichever is less. (rated voltage applied at 25°C)
- **Dielectric strength**: > 250% of rated voltage for 10~100V, 200% for 200&250V, 150% for 500V, 120% for $\geq 1000\text{V}$

Characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T (tolerance range)

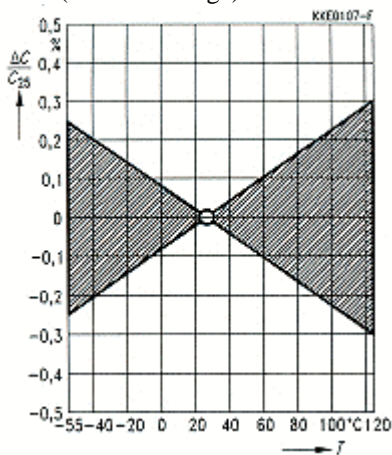


Capacitance change $\Delta C/C_0$ versus superimposed dc voltage V

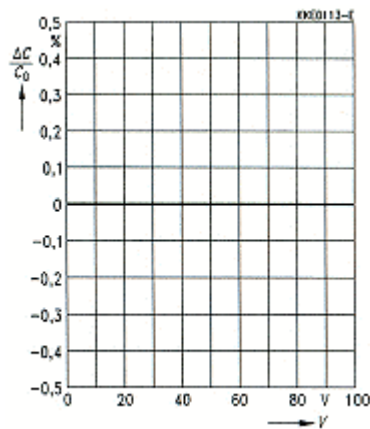

Insulation resistance R_{ins} versus Temperature T

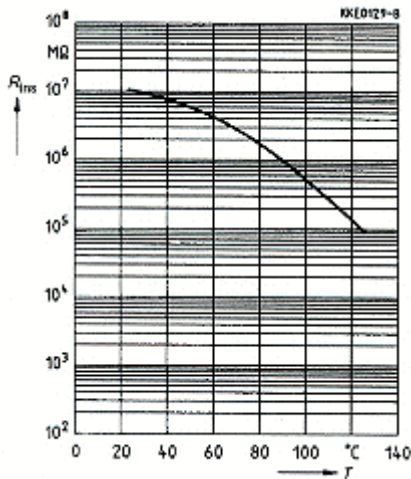

Capacitance change $\Delta C/C_1$ versus time (aging rate)

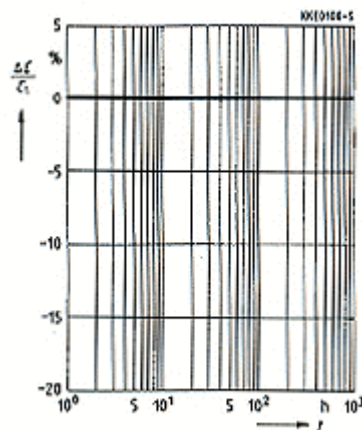

CERAMIC CHIP CAPACTIORS NPO (COG) DIELECTRIC

SIZE AND VALUES AVAILABLE (NPO) 25V – 100V

Size		0402			0603			0805			1206			1210		1812	
(L)Length	mm	1.00±0.05			1.60±0.10			2.00±0.20			3.20±0.20			3.20±0.30		4.50±0.30	
(W)Width	mm	0.50±0.05			0.80±0.10			1.25±0.20			1.60±0.20			2.50±0.20		3.20±0.30	
(T)Max. Thickness	mm	0.50±0.05			0.80±0.10			1.25±0.10			1.65±0.20			2.50±0.30		3.20±0.30	
(t)Terminal	mm	0.15±0.35			0.27~0.60			0.30~0.70			0.30~0.70			0.30~0.70		0.35~1.00	
Capacitance	W.V.(DC)	25	50	100	25	50	100	25	50	100	25	50	100	50	100	50	100
0.47 – 0.82	pF		S	S		P	P		A	A		H	H				
1 – 9.1	pF		S	S		P	P		A	A		H	H				
10	pF		S	S		P	P		A	A		H	H				
12	pF		S	S		P	P		A	A		H	H				
15	pF		S	S		P	P		A	A		H	H				
18	pF		S	S		P	P		A	A		H	H				
22	pF		S	S		P	P		A	A		H	H				
27	pF		S	S		P	P		A	A		H	H				
33	pF		S	S		P	P		A	A		H	H				
39	pF		S	S		P	P		A	A		H	H				
47	pF		S	S		P	P		A	A		H	H				
56	pF		S	S		P	P		A	A		H	H				
68	pF		S	S		P	P		A	A		H	H				
82	pF		S	S		P	P		A	A		H	H				
100	pF		S	S		P	P		A	A		H	H				
120	pF		S	S		P	P		A	A		H	H				
150	pF		S	S		P	P		A	A		H	H				
180	pF		S	S		P	P		A	A		H	H				
220	pF		S	S		P	P		A	A		H	H				
270	pF		S			P	P		A	A		H	H				
330	pF	S	S			P	P		A	A		H	H				
390	pF	S	S			P	P		H	H		H	H				
470	pF	S	S			P	P		H	H		H	H				
560	pF	S				P	P		H	H		H	H				
680	pF	S				P	P		H	H		H	H				
820	pF	S				P	P		H	H		H	H				
1.0	nF	S				P	P		H	H		H	H				
1.2	nF					P			H	H		H	H				X
1.5	nF					P			H	H		H	H				X
1.8	nF					P			H	H		H	H				X
2.2	nF					P			H	H		H	H				X
2.7	nF					P			X	X		H	H				X
3.3	nF					P			X	X		H	H				X
3.9	nF				P			A	X	X		H	H				X
4.7	nF				P			A	X			H	H				X
5.6	nF				P			A	X			H	H				X
6.8	nF				P			A	X			C	C				X
8.2	nF				P			A	X		H	X	X		C		X
10	nF				P			A	X		H	X			C	X	X
15	nF							H			H	X		X	X	X	X
22	nF							X			H	X		X		X	X
33	nF							X			X	L		X		X	X
47	nF										X			Z		L	
68	nF										L			Z		L	
100	nF										L			G		Z	

CERAMIC CHIP CAPACTIORS NPO (COG) DIELECTRIC

SIZE AND VALUES AVAILABLE (NPO) 250V – 3000V

Size	0603				0805				1206				1210					1808			1812																					
(L)	1.60±0.1				2.00±0.20				3.20±0.20				3.20±0.30					4.50±0.30			4.50±0.30																					
(W)	0.80±0.1				1.25±0.20				1.60±0.20				2.50±0.20					2.00±0.20			3.20±0.30																					
(T)	0.80±0.1				0.80±0.10				1.65±0.20				1.65±0.20					2.00±0.20			2.00±0.20																					
(t)	0.27~0.60				0.30~0.70				0.30~0.70				0.30~0.70					0.35~1.00			0.35~1.00																					
Cap./ W.V.	250		200		250		500		250		500		1KV		2KV		250		500		1KV		2K		3K		1KV		2KV		3KV		250		500		1KV		2KV		3KV	
10	pF	P	A	A	A	H	H	H	H					C	L	L	X	X	X							X	X	X					X	X	X							
12	pF	P	A	A	A	H	H	H	H					C	C	L	X	X	X							X	X	X					X	X	X							
15	pF	P	A	A	A	H	H	H	H					C	C	L	X	X	X							X	X	X					X	X	X							
18	pF	P	A	A	A	H	H	H	H					C	C	L	X	X	X							X	X	X					X	X	X							
22	pF	P	A	A	A	H	H	H	H					C	C	L	X	X	X							X	X	X					X	X	X							
27	pF	P	A	A	A	H	H	H	H					C	C	L	X	X	X							X	X	X					X	X	X							
33	pF	P	A	A	A	H	H	H	C					C	C	L	X	X	X							X	X	X					X	X	X							
39	pF	P	A	A	A	H	H	H	C					C	C	L	X	X	X							X	X	X					X	X	X							
47	pF	P	A	A	A	H	H	C	C					C	X	L	X	X	X							X	X	X					X	X	X							
56	pF	P	A	A	A	H	H	C	X					C	X	L	X	X	X							X	X	X					X	X	X							
68	pF	P	A	A	A	H	H	C	X					C	X	L	X	X	X							X	X	X					X	X	X							
82	pF	P	A	A	H	H	H	X	X					C	X	L	X	X	X							X	X	X					X	X	X							
100	pF	P	A	H	H	H	H	X	X					X	X	L	X	X	Z							X	X	X					X	X	X							
120	pF	P	A	H	X	H	H	X	L					X	X	L	X	X	Z							X	X	X					X	X	X							
150	pF	P	H	X	X	H	H	X	L					X	L	L	X	Z	Z							X	X	X					X	X	X							
180	pF	P	H	X	X	H	H	L	L					X	L	L	X	Z	Z							X	X	Z					X	X	Z							
220	pF	P	X	X	X	H	H	L	L					L	L	L	X	Z	Z							X	X	Z					X	X	Z							
270	pF		X	X	X	C	C	L						L	L		Z	Z	Z							X	Z	Z					X	Z	Z							
330	pF		X	X	X	C	C	L						L	L		Z	Z	Z							X	Z	Z					X	Z	Z							
390	pF		X	X	X	C	C	L						L	L		Z	Z								X	Z	Z					X	Z	Z							
470	pF		X	X		C	C	L						L	L		Z	Z								Z	Z						Z	Z								
560	pF		X			X	X	L						L	L		Z	Z								Z	Z						Z	Z								
680	pF		X			X	X	L						L			Z									Z							Z	Z								
820	pF		X			L	L	L						L			Z									Z							Z	Z								
1000	pF		X			L	L	L		X	X			L			Z									X	X	Z					X	X	Z							
1200	pF					L	L			X	X						Z									X	X	Z					X	X	Z							
1500	pF					L	L			X	X															X	X	Z					X	X	Z							
1800	pF					L	L			X	X															X	X	Z					X	X	Z							
2200	pF					L	L			X																X	X	Z					X	X	Z							
2700	pF									X																X	X						X	X								
3300	pF									X																X	X						X	X								

Thickness Code: Standard Packing Q'ty per reel

Thickness Code	Chip Size	Chip Thickness	Max Carrier Thickness	Q'ty of carboard tape in		Q'ty of Embosses tape in	
				7" reel	13" reel	7" reel	13" reel
S	0402	0.50±0.05 mm	0.60 mm	10,000	50,000	--	--
P	0603	0.80±0.10 mm	0.95 mm	4,000	15,000	--	--
A	0805	0.60±0.10 mm	0.75 mm	4,000	15,000	--	--
H		0.85±0.10 mm	0.90 mm	4,000	15,000	--	--
X		1.25±0.10 mm	1.25 mm	--	--	3,000	10,000
H	1206	0.85±0.10 mm	0.90 mm	4,000	15,000	--	--
C		0.95±0.10 mm	1.80 mm			3,000	10,000
X		1.25±0.10 mm	1.80 mm	--	--	3,000	10,000
L		1.65±0.20 mm	1.80 mm	--	--	2,000	--
C	1210	0.95±0.10 mm	1.80 mm			3,000	10,000
X		1.25±0.10 mm	1.80 mm	--	--	2,000	--
L		1.65±0.20 mm	1.80 mm	--	--	2,000	--
Z		2.00±0.20 mm	2.20 mm	--	--	2,000	--
G		2.50±0.20 mm	2.75 mm	--	--	1,000	--
X	1808	1.25±0.10 mm	1.80 mm	--	--	2,000	--
F		1.40±0.20 mm	1.80 mm			2,000	--
L		1.65±0.20 mm	1.80 mm	--	--	2,000	--
Z		2.00±0.20 mm	2.20 mm	--	--	1,000	--
X	1812	1.25±0.10 mm	1.80 mm	--	--	1,000	--
L		1.65±0.20 mm	1.80 mm	--	--	1,000	--
Z		2.00±0.20 mm	2.20 mm	--	--	1,000	--
G		2.50±0.20 mm	2.75 mm	--	--	500	--