


Taping of leaded capacitors

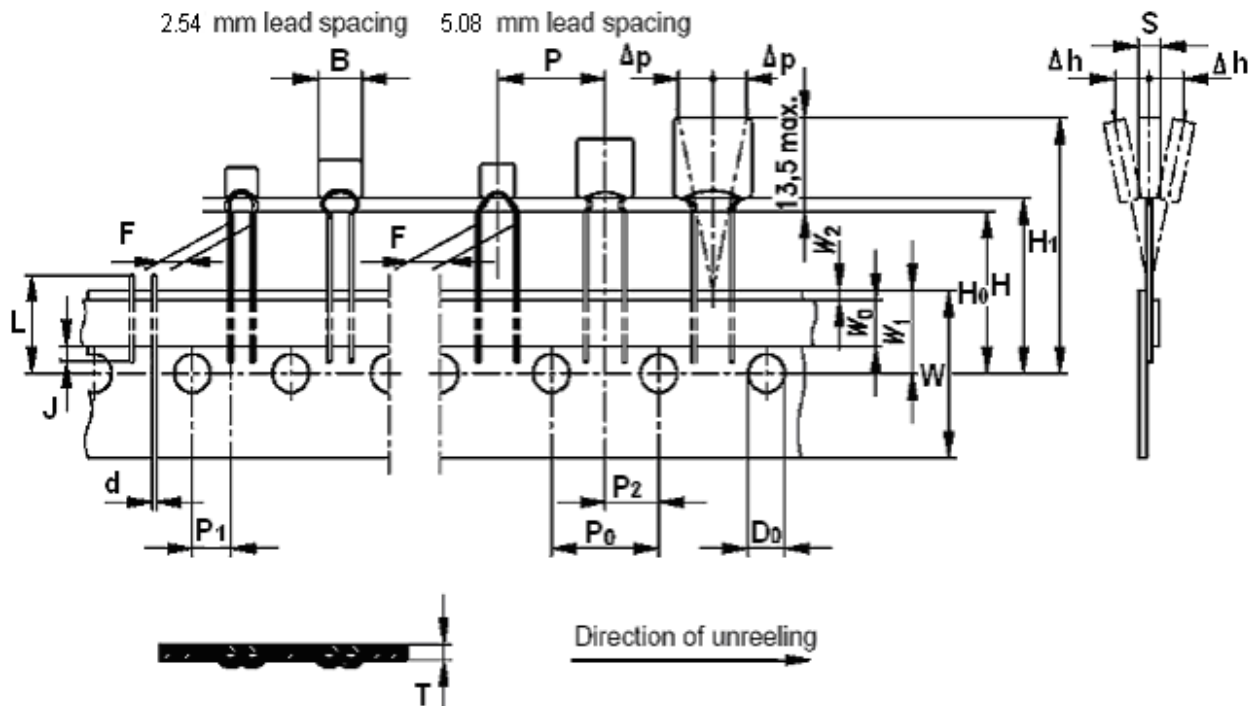

Dimensions (mm)	Lead spacing		Tolerance	Comments
	2.54mm	5.08mm		
B	11.0	11.0	max	
S	2.5	2.5	max	
d	0.55	0.55	±0.05	
P	12.7	12.7	±1.0	
P ₀	12.7	12.7	±0.2	±1mm/20 hole spaces
P ₁	5.08	3.81	±0.7	
P ₂	6.35	6.35	±1.3	
F	2.54	5.08	±0.6/-0.1	
Δh	0	0	±2.0	Measured at top of component body
Δp	0	0	±1.3	
W	18.0	18.0	±0.5	
W ₀	5.5	5.5	Min	Peel force ≥ 5 N
W ₁	9.0	9.0	±0.5	
W ₂	1.0	1.0	-0.5	
H	18.0	18.0	±2.0	
H ₀	16.0	16.0	±0.5	
H ₁	32.2	32.2	Max	
D ₀	4.0	4.0	±0.2	
T	0.7	0.7	+0.2	
L	11.0	11.0	max	
J	1.0	1.0	max	

Package

Code	Package	Q'ty
L	Bulk	1000pcs
B	Ammo Pack	2000pcs
R	Tape Reel	2500pcs