


Construction and Dimension:

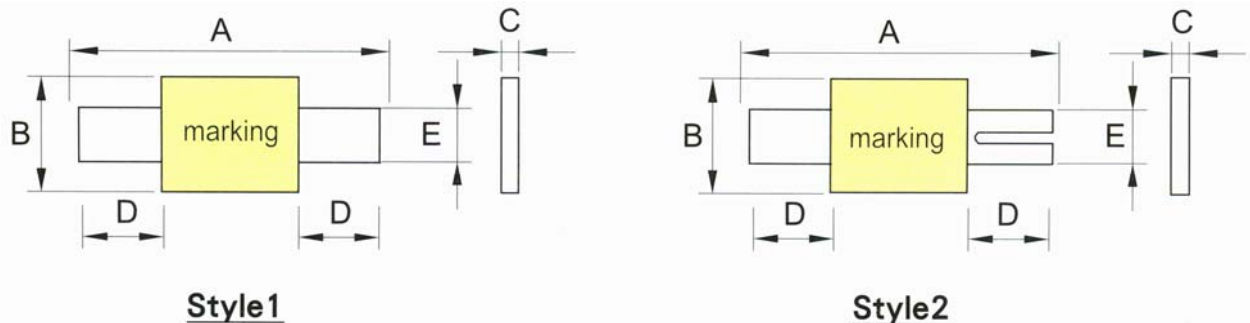

Unit:mm

Model	A		B		C		D		E		Style
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
SLR190	20.0	22.1	4.8	5.3	0.5	1.1	4.7	6.7	3.8	4.2	1
SLR190S	20.0	22.1	4.8	5.3	0.5	1.1	4.7	6.7	3.8	4.2	2
SLR260	20.5	23.1	4.8	5.3	0.5	1.1	4.0	6.0	3.8	4.2	1
SLR260S	20.5	23.1	4.8	5.3	0.5	1.1	4.0	6.0	3.8	4.2	2
SLR380	23.5	26.0	9.8	10.5	0.5	1.1	5.0	7.0	5.7	6.3	1
SLR450	23.5	26.0	9.8	10.5	0.5	1.1	5.0	7.0	5.7	6.3	1
SLR550	34.5	37.0	6.7	7.3	0.5	1.1	5.0	7.0	4.7	5.3	1
SLR600	23.5	26.0	12.7	13.3	0.5	1.1	4.0	6.0	5.7	6.3	1
SLR730	27.0	29.1	14.0	14.5	0.5	1.1	4.0	6.0	5.7	6.3	1

***Slit size:0.5mm x 4.0mm (Nominal)**

Electrical Characteristics at 23°C:

Model	V Max. (Volts)	I Max. (Amps)	I hold (Amps)	I trip (Amps)	R min (Ω)	R min (Ω)	R1 max (Ω)	P(d) (Watts)
SLR190	16	100	1.9	3.9	0.039	0.072	0.102	1.2
SLR190S	16	100	1.9	3.9	0.039	0.072	0.102	1.2
SLR260	16	100	2.6	5.8	0.020	0.042	0.063	2.5
SLR260S	16	100	2.6	5.8	0.020	0.042	0.063	2.5
SLR380	16	100	3.8	8.9	0.013	0.026	0.037	2.5
SLR450	20	100	4.5	8.9	0.011	0.020	0.028	2.5
SLR550	20	100	5.5	10.5	0.009	0.016	0.022	2.8
SLR600	20	100	6.0	11.7	0.007	0.014	0.019	2.8
SLR730	20	100	7.3	14.1	0.006	0.012	0.015	3.3