


**(B) Taping Specification**

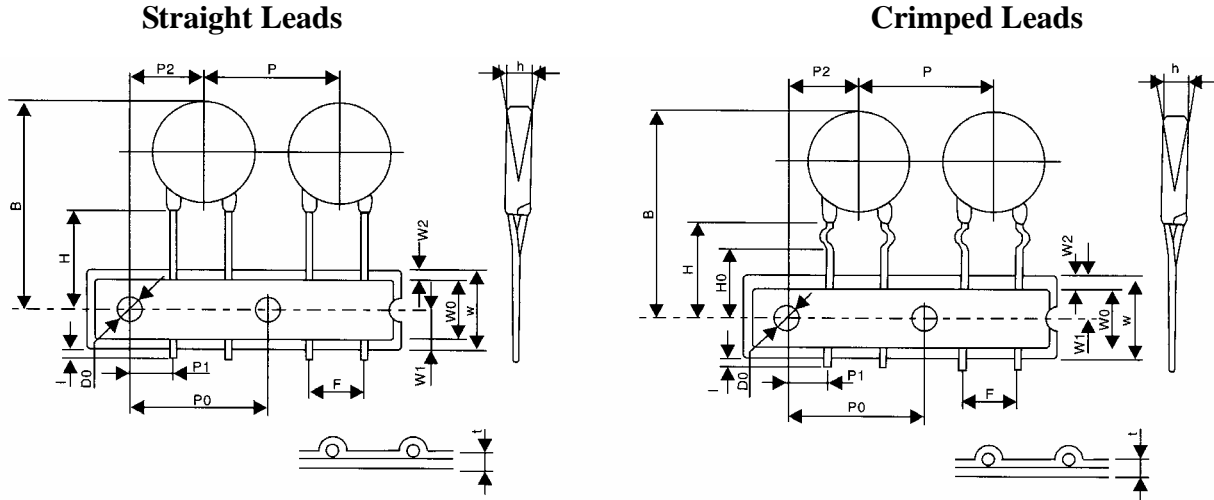

Symbol	Parameter	Series				
		05D	07D	10D	14D	20D
P	Pitch of Component	12.7±1.0	12.7±1.0	25.4±1.0	25.4±1.0	25.4±1.0
P <sub>0</sub>	Feed Hole Pitch	12.7±0.3	12.7±0.3	12.7±1.0	12.7±1.0	12.7±1.0
P <sub>1</sub>	Feed Hole Center to Lead	3.85±0.7	3.85±0.7	8.95±0.7	8.95±0.7	7.7±0.7
P <sub>2</sub>	Hole Center to Component Center	6.35±1.3	6.35±1.3	12.7±1.3	12.7±1.3	12.7±1.3
F	Lead to Lead Distance	5.0±0.8	5.0±0.8	7.5±0.8	7.5±0.8	10.0±0.8
Δh	Component Alignment	0±2	0±2	0±2	0±4	0±4
W	Tape Width	18.0±1.0	18.0±1.0	18.0±1.0	18.0±1.0	18.0±1.0
W <sub>0</sub>	Hold Down Tape Width	12.0±1.0	12.0±1.0	12.0±1.0	12.0±1.0	12.0±1.0
W <sub>1</sub>	Hold Position	9.0±0.5	9.0±0.5	9.0±0.5	9.0±0.5	9.0±0.5
W <sub>2</sub>	Hold Down Tape Position	3.0max	3.0max	3.0max	3.0max	3.0max
H	Height from Tape Center to Component	20.0±2.0	20.0±2.0	20.0±2.0	20.0±2.0	20.0±2.0
H <sub>0</sub>	Height from Tape Center to Component	16.0±1.0	16.0±1.0	16.0±1.0	16.0±1.0	16.0±1.0
l	Length of Clipped Lead	1.0max	1.0max	1.0max	1.0max	1.0max
D <sub>0</sub>	Feed Hold Diameter	4.0±0.2	4.0±0.2	4.0±0.2	4.0±0.2	4.0±0.2
t	Total Tape Thickness	0.6±0.3	0.6±0.3	0.6±0.3	0.6±0.3	0.6±0.3
B	Height from Tape Center to Component	32max	32max	36max	40max	45max

Note : Applicable Lead style First style First Code :A, I, J only

UNIT: mm

**Packaging Specifications**

Packing	Dimensions in mm	Series	Quantity
T/Box		05D	1500
		07D	1500
		10D	1000
		14D	500
		20D	500
Reel		05D	2000
		07D	2000
		10D	1000
		14D	750
		20D	500