
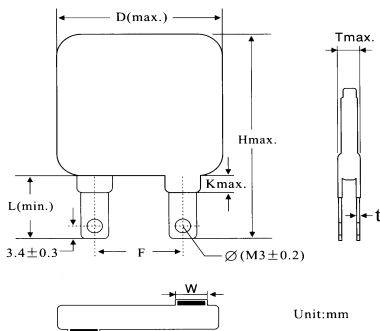


● 34S series

Model Number	Maximum Allowable Voltage		Varistor Voltage V _{1.0mA} (V)	Clamping Voltage (MAX.)		Maximum Peak Current (8/20µs)		Maximum Energy (10/1000µs) JOULE	Typical Capacitance (Reference) @1KHz (pF)	
	AC (V)	DC (V)		VC (V)	IP (A)	In	I Max			
							(KA)			
34S470K	30	38	47(42-52)	93	60	10	20	96	35000	*
34S560K	35	45	56(50-63)	110				115	29500	*
34S680K	40	56	68(61-75)	135				136	24200	*
34S820K	50	65	82(74-90)	135	15	30	156	17950	*	
34S101K	60	85	100(90-110)	165			195	15000	*	
34S121K	75	100	120(108-132)	200			235	12200	*	
34S151K	95	125	150(135-165)	250	20	45	296	10000	*	
34S181K	115	150	180(162-198)	300			350	8250	*	
34S201K	130	170	200(185-225)	340			400	6750	*	
34S221K	140	180	220(198-242)	360	20	45	450	6400	*	
34S241K	150	200	240(222-270)	395			480	5650	*	
34S271K	180	225	270(256-310)	455			540	5100	*	
34S301K	190	250	300(270-330)	500	20	45	600	4510	*	
34S331K	210	275	330(297-363)	550			656	4150	*	
34S361K	230	300	360(324-396)	595			745	3750	*	
34S391K	250	320	390(362-440)	650	20	45	830	3500	*	
34S431K	275	350	430(387-473)	710			920	2950	*	
34S471K	300	385	470(423-517)	775			1000	2880	*	
34S511K	320	415	510(459-561)	845	20	45	1060	2650	*	
34S561K	350	460	560(504-616)	925			1150	2450	*	
34S621K	385	505	620(558-682)	1025			1250	2200	*	
34S681K	420	560	680(612-748)	1120	20	45	1250	2000	*	
34S751K	460	615	750(675-825)	1240			1280	1820	*	
34S781K	485	640	780(702-858)	1290			1350	1750	*	
34S821K	510	670	820(738-902)	1355	20	40	1395	1650	*	
34S911K	550	745	910(819-1001)	1500			1475	1500	*	
34S951K	575	760	950(855-1045)	1570			1485	1430	*	
34S102K	625	825	1000(900-1100)	1650	15	40	1550	1350	*	
34S112K	680	895	1100(990-1210)	1815			1700	1230	*	
34S122K	750	990	1200(1150-1320)	1980			1750	1135	*	
34S142K	850	1120	1400(1315-1540)	2310	15	40	1750	970	*	
34S162K	1000	1320	1600(1550-1760)	2640			2000	840		
34S182K	1100	1485	1800(1700-1980)	2970			2000	800		



D (max.)	36
H (max.)	56.6
T (max.)	Ref.Tab1
F (±0.5)	22/25.4
t (±0.1)	0.5
L (min.)	16.5
K (max.)	5
W (±0.5)	6/7
Ø(M3±0.2)	3.8

Model	T(max.)	Model	T(max.)	Model	T(max.)
470K	6.5	271K	6.9	781K	10.2
560K	6.8	331K	7.3	821K	10.8
680K	7.2	361K	7.6	911K	11.2
820K	5.9	391K	7.8	951K	11.0
101K	6.1	431K	8.0	102K	11.2
121K	6.3	471K	8.3	112K	12.3
151K	6.6	511K	8.7	122K	13.0
181K	6.3	561K	9.0	142K	14.3
201K	6.4	621K	9.4	162K	13.3
221K	6.6	681K	9.5	182K	14.2
241K	6.7	751K	10.0		