

Data Sheet

Customer: _____

Product: Aluminum Electrolytic Capacitors – AEHP Series

AEC-Q200 version available

Size : 22x25mm ~ 40x70mm _____

Issued Date: 16-Oct-2023 _____

Edition: Ver. 1 _____

Record of change

Date	Ver.	Description	Page
16-Oct-2023	1		

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969


Prepared by	Checked by	Approved by	Accepted by (customer)
16-Oct-2023	16-Oct-2023	16-Oct-2023	
Andy Hsu	Hwa Wu	Hwa Wu	

- 105°C 2000 hours assured load life.
- Directly mountable on printed circuit board without holders.
- Rohs compliant
- Aluminum case designed explosion-proof vent.
- AEC-Q200 version available

Characteristics

Voltage Range	10 ~ 100V				160 ~ 450V			
Capacitance Range	560 ~ 47000uF				47 ~ 2200uF			
Temperature Range	-40 ~ +105°C				-25 ~ +105°C			
Capacitance Tolerance	±20% at 120Hz , 20°C(10% Tol. is available upon request)							
Leakage Current	I = 3√CV (uA) max C: Capacitance, V:W.V. (After 5 minutes)							
Dissipation Factor (tanδ) (at 20°C, 120Hz)	Less than the value under table (%)							
	uF \ W.V.	10 ~ 16	25~ 35	50~63	80~100	160~250	315~450	500
	47 ~ 390	--	--	--	15	15	20	25
	470 ~ 3900	25	20	20	20	15	20	25
	4700~8200	35	30	30	25	--	--	--
	10000~22000	40	35	30	--	--	--	--
	27000~47000	45	40	35	--	--	--	--
	56000~68000	50	45	--	--	--	--	--
	Stability at Low Temperature	Impedance ration at 120Hz between the -25°C or -40°C value and 20°C value shall not exceed :						
RWC (V)		10~16	25	35~100	160	200~250	350~450	500
Z-25°C/Z 20°C		5	4	4	4	4	8	10
Z-40°C/Z 20°C		15	15	12	--	--	--	--
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after rated working voltage applied for 2,000 hours at max. operating temperature with the rated ripple current.							
	Capacitance change ≤±20% of the initial value. Dissipation factor ≤±200% of the initial specified value Leakage current ≤The initial specified value.							
Shelf Life	After storage for 1000 hours at 105°C with no voltage applied, the capacitor shall meet the specified limit in load life. Pre-treatment for measurement shall be conducted after application of DC working voltage for 30 minutes.							

Diagram of Dimensions: unit(mm)

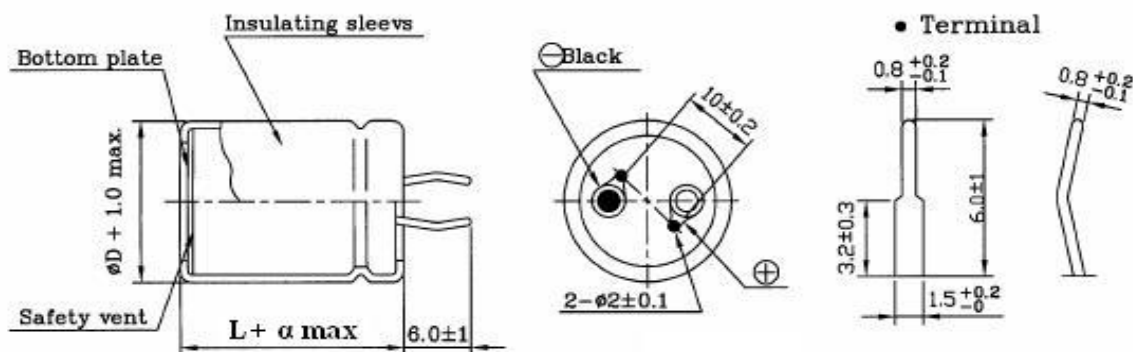

Multiplier for Ripple Current VS Frequency

Cap.(uF)\ (Hz)	50(60)	120	400	1K	10K	50K-100K
10 < Cap. ≤ 100	0.8	1	1.23	1.36	1.48	1.53
100 < Cap. ≤ 1000	0.8	1	1.16	1.25	1.35	1.38
1000 < Cap.	0.8	1	1.11	1.17	1.25	1.28

Dia	22 ~ 25	30 ~ 40
α	2	3

Standard Products Table

[illegible][illegible][illegible]

Standard Products Table

[illegible]

W.V.	160								200							
Dimension	A		B		C		D		A		B		C		D	
Cap. (uF)	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC
220	22x25	0.42							22x25	0.92						
270	22x25	0.74							22x30	1.03	25x25	1.03				
330	22x30	0.98	25x25	0.98					22x35	1.21	25x30	1.21	30x25	1.21		
390	22x35	1.15	25x30	1.10	30x25	1.10			22x40	1.41	25x35	1.43	30x30	1.45		
470	22x35	1.21	25x30	1.21	30x25	1.21			22x40	1.62	25x30	1.62	35x25	1.65		
560	22x40	1.40	25x35	1.40	30x30	1.40	35x25	1.40	22x45	1.81	25x40	1.85	30x30	1.85	35x25	1.85
680	22x45	1.64	25x40	1.67	30x35	1.75	35x30	1.80	22x50	2.04	25x40	2.07	30x30	2.04		
820	25x45	1.85	30x35	1.85	35x30	1.85			22x55	2.12	25x50	2.17	30x35	2.17	35x30	2.17
1000	25x45	2.15	30x40	2.15	35x30	2.15			30x45	2.75	35x40	2.75				
1200	25x55	2.46	30x45	2.46	35x35	2.46			30x50	3.00	35x40	3.00				
1500	30x50	2.80	35x40	2.80					35x50	3.46						
1800	30x50	3.13	35x40	3.13					35x50	4.01						
2200	35x50	3.39							35x60	4.39						

[illegible]

Standard Products Table

W.V.	400								450							
Dimension	A		B		C		D		A		B		C		D	
Cap. (uF)	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC
47	22x25	0.56							22x25	0.35						
56	22x25	0.63							22x30	0.41	25x25	0.41				
68	22x25	0.72							22x30	0.43	25x25	0.43				
82	22x30	0.77	25x30	0.82	30x25	0.85			22x35	0.45	25x25	0.45	30x25	0.45		
100	22x35	0.82	25x25	0.61	25x30	0.82	30x25	0.82	22x40	0.74	25x25	0.62	25x30	0.74		
120	22x35	0.90	25x30	0.90	30x25	0.90			22x45	0.82	25x35	0.82	30x30	0.82		
150	22x40	0.98	25x30	0.95	25x40	0.98	35x25	0.95	22x50	0.96	25x40	0.96	30x35	0.96	35x25	0.96
180	22x45	1.14	25x40	1.14	30x35	1.14	35x30	1.14	25x45	1.14	30x35	1.14	35x30	1.14		
220	22x50	1.21	25x45	1.21	30x35	1.21	35x30	1.21	25x45	1.20	30x35	1.20	30x40	1.24	35x35	1.24
270	25x50	1.40	30x45	1.40	35x35	1.40			25x50	1.21	30x50	1.48	35x40	1.48		
330	30x50	1.57	35x40	1.57					30x50	1.64	35x45	1.64	35x30	1.27		
390	30x50	1.71	35x40	1.71					30x50	1.64	35x50	1.86				
470	30x50	1.98	35x45	1.98	35x40	1.78			35x50	1.70	35x40	1.71				
560	35x50	2.23	35x40	1.86					35x45	1.96	40x40	2.02				
680	35x50	2.25	40x40	2.22					35x55	2.35	40x45	2.33				
820	35x55	2.58	40x50	2.67					40x60	2.62						
1000	35x65	2.90	40x55	2.92					40x70	3.03						
1200	35x75	3.39	40x60	3.31					40x70	3.54						

Unit : (mm)

Ripple Current (A, rms) at 105 °C 120Hz

Part Numbering Designation

<u>AEHP</u>	<u>101</u>	<u>M</u>	<u>2G</u>	<u>B</u>	<u>A</u>
SERIES	CAPACITANCE	TOL.	W.V.	PACKAGE	SIZE
	IN 3DIGITS	M= ± 20%	16= 16V	B= Bulk	A= A Size
	101= 100uF	K= ± 10%	25= 25V		B= B Size
	102= 1000uF		35= 35V		C= C Size
	103= 10,000uF		50= 50V		D=D Size
			63= 63V		
			80= 80V		
			2A= 100V		
			2C= 160V		
			2D= 200V		
			2E= 250V		
			2V= 350V		
			2G= 400V		
			2W= 450V		