

## *Data Sheet*

Customer: \_\_\_\_\_

Product: Aluminum Electrolytic Capacitors – ENR Series \_\_\_\_\_

Size : 5x11mm ~ 16x32mm \_\_\_\_\_

Issued Date: 30-May-2023 \_\_\_\_\_

Edition: Ver. 3 \_\_\_\_\_

### Record of change

Date	Ver.	Description	Page
15-Aug-2016	1		
29-Mar.-2023	2	Revised 220uF/100V Size 16x26	2
30-May-2023	3	Life time 105°C 2000 Hours	1
05-Oct-2023	4	Edit iemt	3

## **HITANO ENTERPRISE CORP.**

7F-7, No. 3, Wu Chuan 1<sup>st</sup> Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969


Prepared by	Checked by	Approved by	Accepted by (customer)
29-May-2023	29-May.-2023	29-May.-2023	
Hwa Wu	Andy Hsu	Arthur Su	

- These are non-polar capacitors designed for circuits with reversing polarity.
- Tolerance of  $\pm 10\%$  (K) if required can also be available on request.
- Life time 105°C 2000 Hours

**Characteristics**

<b>Voltage Range</b>	10~100V							
<b>Capacitance Range</b>	0.47~3300uF							
<b>Temperature Range</b>	-40 ~ + 105°C							
<b>Capacitance Tolerance</b>	+20% -20% (at 20°C, 120Hz)							
<b>Leakage Current</b>	I=0.03C or 3uA max. (After 3 minutes)							
<b>Dissipation Factor(tanδ) (at 20°C, 120Hz)</b>	Rated voltage	10V	16V	25V	35V	50V	63V	100V
	tanδ	0.25	0.20	0.18	0.15	0.15	0.12	0.10
<b>Stability at Low Temperature</b>	Impedance ration at 120Hz							
	Rated Voltage (V)	10V	16V	25V	35V	50V	63V	100V
	Z-25°C/Z 20°C	3	2	2	2	2	2	2
	Z-40°C/Z 20°C	6	4	4	4	4	4	3
<b>Load Life</b>	After 2000hrs. application of DC rated working voltage at +105°C,with the polarity inverted every 250hrs,capacitors meet the characteristic of following requirements.				Capacitance change	≤±20% of initial measured value		
					D.F. (tanδ)	≤200% of initial specified value		
					Leakage current	≤200% of initial specified value		

**Diagram of dimensions (Unit:mm)**

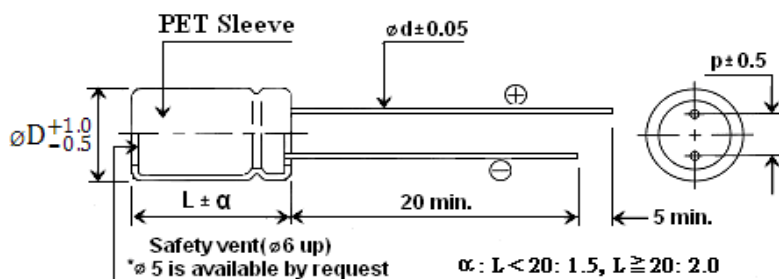

Dφ	4	5	6.3	8	10	13	16	18
p	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5
dφ	0.45	0.5	0.5	0.5	0.6	0.6	0.8	0.8

**Ripple Current Coefficients**

Frequency (Hz)	50(60)	120	400	1K	10K	100K
Cap.(uF) / Hz	Multiplier					
Cap. ≤ 10	0.75	1	1.30	1.55	2.0	2.0
10 < Cap. ≤ 100	0.75	1	1.3	1.55	2.0	2.0
100 < Cap. ≤ 1000	0.8	1	1.2	1.3	1.5	1.5
1000 < Cap.	0.85	1	1.10	1.10	1.15	1.15

**Case Size of Standard Products & Maximum Ripple Current ( mA rms 105°C 120Hz)**

Cap. wv	10		16		25		35		50		63		100		
	uF	Size	R.C.	Size	R.C.	Size	R.C.	Size	R.C.	Size	R.C.	Size	R.C.	Size	R.C.
0.47										4x7 5x11	5 8	5x11	9	5x11	10
1										4x7 5x11	10 12	5x11	14	5x11	15
2.2							4x7	13	5x7 5x11	16 17	5x11	20	6.3x11	22	
3.3					4x7	14	5x7	18	5x7 5x11	20 23	5x11	25	6.3x11	22	
4.7			4x7	18	5x7	19	5x7	22	6.3x7 5x11	27 30	5x11	30	8x12	36	
10			5x7 5x11	30 34	6.3x7 5x11	34 35	6.3x7 5x11	35 38	8x7 6.3x11	44 50	6.3x11	52	8x12	52	
22	5x7	38	6.3x7 5x11	51 53	6.3x7 6.3x11	53 55	8x7 6.3x11	58 65	8x12	85	8x12	88	10x16	120	
33	6.3x7	52	6.3x7 5x11	58 62	8x7 6.3x11	72 70	8x7 8x12	70 75	8x12	89	10x13	115	10x21	175	
47	5x11	79	8x7 6.3x11	73 90	8x7 6.3x11	80 96	8x12	107	8x12	123	10x16	150	13x21	187	
100	8x7 6.3x11	105 99	8x7 6.3x11	120 123	8x12	152	10x13	198	10x16	220	13x21	295	16x26	399	
220	8x12	157	10x13	234	10x13	245	10x21	320	13x21	340	13x26	420	16x26	520	
330	10x13	235	10x13	255	10x16	310	13x21	370	16x26	500	16x26	520			
470	10x13	290	10x16	360	13x21	420	13x26	495	16x32	590					
1000	10x21	430	13x21	511	16x26	1120	16x31	1270							
2200	16x26	830	16x32	950											
3300	16x32	1150													

Unit: mm

**Part Numbering System**

ENR SERIES	101 CAPACITANCE	M TOL.	25 W.V.	A PACKAGE	- SIZE	T1 LEAD SPACE
	IN 3DIGITS	K= ± 10%	0J= 6.3V	B= Bulk	Omit if only	Omit if Bulk
	010= 1.0uF	M= ± 20%	10= 10V	C5= Cut 5mm	one size	T1= L/S 2.5mm Taped
	4R7= 4.7 uF		25= 25V	A= Ammo Pack	A=Size of	TA= Lead forming space
	101= 100uF		63= 63V	R= Tape&Reel	7mm height	5mm Taped
	102= 1000uF		2A= 100V			T35= L/S 3.5mm Taped
				F5= Lead formed & cut 5mm		T2=L/S 5mm Taped
						T3= L/S 7.5mm Taped