

Data Sheet

Customer : _____

Product : Conductive Polymer Hybrid Aluminum Electrolytic Capacitors
Radial Type, Standard, 125°C 4,000Hours – HHPR Series

Size : 8x9mm ~ 10x16mm

Issued Date : 01-Sep.-2025

Edition : Ver.1

Record of change

Date	Ver.	Description	Page

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,
New Taipei City, TAIWAN, R.O.C.
Tel: +886 2 2299 1331 (Rep.)
Fax: +886 2 2298 2466, 2298 2969

Prepared by	Checked by	Approved by	Accepted by (customer)
01-Sep.-2025	01-Sep.-2025	01-Sep.-2025	
Randy Yu	Michelle Lin	Arthur Su	

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS


Radial Type, 125°C Standard

- High reliability and high voltage realized by hybrid electrolyte
- Endurance: 4,000 hours at 125°C
- Rated Voltage : 25V ~ 80V
- Rated capacitance : 22 ~ 1,000 μ F

SPECIFICATIONS

Item	Performance Characteristics						
Operating Temperature range	-55 + 125°C						
Rated Voltage Range	25V ~ 80V						
Capacitance Tolerance	± 20% (at 120 Hz/ 20°C)						
Leakage Current	I ≤ 0.01 CV or less (2 minutes , 20°C) Not greater than the formula above after 2 minutes voltage applied. I : Leakage current (μA) C : Capacitance (μF) V : Voltage(VDC)						
Dissipation Factor (tan δ)	Rated voltage(V)	25	35	50	63	80	(20°C · 120 Hz)
	tan δ (Max.)	0.14	0.12	0.10	0.08	0.08	
Temperature Characteristics (Impedance ratio at 100 KHz)	Z (-25°C)/ Z (+20°C) < 2.0 Z (-55°C)/ Z (+20°C) < 2.5						
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 4,000 hours at 125°C.						
	Capacitance change		≤ ± 30% of the initial value				
	D. F. (Tan δ)		≤ 200% of initial specified value				
	ESR		≤ 200% of initial specified value				
	Leakage current		Initial specified value or less				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.						
	Capacitance change		≤ ± 30% of the initial value				
	D. F. (Tan δ)		≤ 200% of initial specified value				
	ESR		≤ 200% of initial specified value				
	Leakage current		Initial specified value or less				
Bias Humidity Test	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 85°C, 85% RH for 2,000 hours.						
	Capacitance change		≤ ± 30% of the initial value				
	D. F. (Tan δ)		≤ 200% of initial specified value				
	ESR		≤ 200% of initial specified value				
	Leakage current		Initial specified value or less				
Appearance		No significant damage					
Resistance to Soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after the soldering.						
	Capacitance change		≤ ± 10% of the initial value				
	D. F. (Tan δ)		≤ the initial specified value				
	Leakage current		≤ the initial specified value				

Dimension

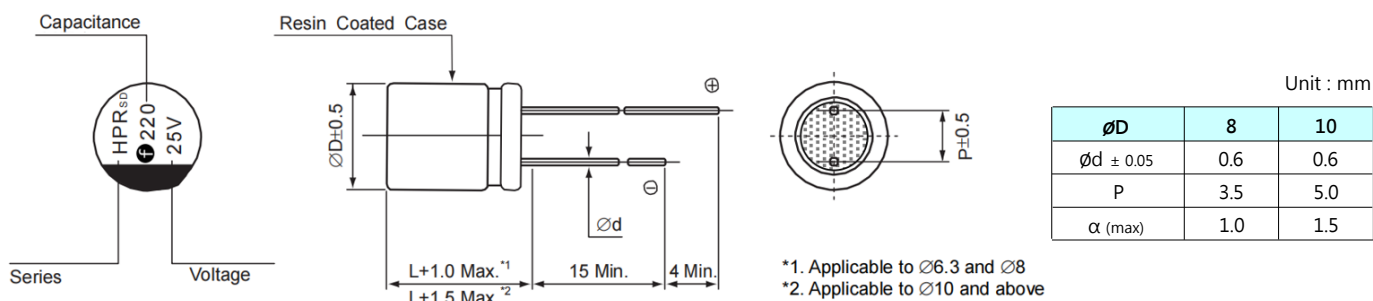

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

■ Part Numbering (example: 120 μ F 50V 8x12mm)

HHPR **121** **M** **1H** **R** **B** **D** **120** **S** **P** **00**
 SERIES CAPACITANCE TOL. W.V. TYPE LEAD DIA. LENGTH PRINTING COLOR RUBBER LEAD PROCESS

■ Standard Products Table

Rated voltage (V.DC)	Rated Capacitance (μ F)	Case Size D x L (mm)	$\tan \delta$	ESR (m Ω max. 20°C/100 KHz)	Rated ripple current (mA _{rms} /125°C,100KHz)
25 (1E)	330	8 x 9	0.14	27	2,900
	470	8 x 12	0.14	20	3,400
	560	10 x 10	0.14	20	3,400
	680	10 x 12	0.14	18	3,900
	1000	10 x 16	0.14	11	4,500
35 (1V)	220	8 x 9	0.12	27	2,700
	270	8 x 12	0.12	20	3,200
	330	10 x 10	0.12	20	3,200
	470	10 x 12	0.12	14	3,700
	680	10 x 16	0.12	11	4,200
50 (1H)	68	8 x 9	0.10	30	2,600
	120	8 x 12	0.10	28	2,800
	150	10 x 10	0.10	28	2,800
	220	10 x 12	0.10	17	3,200
	270	10 x 16	0.10	13	3,500
63 (1J)	47	8 x 9	0.08	32	2,400
	100	8 x 12	0.08	25	2,700
		10 x 10	0.08	25	2,700
	180	10 x 12	0.08	20	2,900
80 (1K)	220	10 x 16	0.08	15	3,500
	22	8 x 9	0.08	45	1,050
	47	8 x 12	0.08	36	1,360
		10 x 10	0.08	36	1,360
	82	10 x 12	0.08	32	1,550
	100	10 x 16	0.08	28	1,800

■ Frequency coefficient of allowable ripple current

Frequency	120 Hz < f < 1 KHz	1 KHz < f < 10 KHz	10 KHz < f < 100 KHz	100 KHz < f < 300 KHz
Coefficient	0.10	0.40	0.70	1.00