

Data Sheet

Customer : _____

Product : Conductive Polymer Hybrid Aluminum Electrolytic Capacitors
Radial Type, Standard, 105°C 10,000Hours – HHPV Series

Size : 8x9mm ~ 10x12mm

Issued Date : 01-Sep.-2025

Edition : Ver.1

Record of change

Date	Ver.	Description	Page

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,
New Taipei City, TAIWAN, R.O.C.
Tel: +886 2 2299 1331 (Rep.)
Fax: +886 2 2298 2466, 2298 2969

Prepared by	Checked by	Approved by	Accepted by (customer)
01-Sep.-2025	01-Sep.-2025	01-Sep.-2025	
Randy Yu	Michelle Lin	Arthur Su	

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS


Radial Type, 105°C Standard

- High reliability and high voltage realized by hybrid electrolyte
- Endurance: 10,000 hours at 105°C
- Rated Voltage : 25V ~ 80V
- Rated capacitance : 22 ~ 470 μ F

SPECIFICATIONS

Item	Performance Characteristics						
Operating Temperature range	-55 + 105℃						
Rated Voltage Range	25V ~ 80V						
Capacitance Tolerance	± 20% (at 120 Hz/ 20℃)						
Leakage Current	I ≤ 0.01 CV or less (2 minutes , 20℃) Not greater than the formula above after 2 minutes voltage applied. I : Leakage current (μA) C : Capacitance (μF) V : Voltage(VDC)						
Dissipation Factor (tan δ)	Rated voltage(V)	25	35	50	63	80	(20℃ · 120 Hz)
	tan δ (Max.)	0.14	0.12	0.10	0.08	0.08	
Temperature Characteristics (Impedance ratio at 100 KHz)	Z (-25℃)/ Z (+20℃) < 2.0 Z (-55℃)/ Z (+20℃) < 2.5						
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105℃.						
	Capacitance change		≤ ± 30% of the initial value				
	D. F. (Tan δ)		≤ 200% of initial specified value				
	ESR		≤ 200% of initial specified value				
	Leakage current		Initial specified value or less				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.						
	Capacitance change		≤ ± 30% of the initial value				
	D. F. (Tan δ)		≤ 200% of initial specified value				
	ESR		≤ 200% of initial specified value				
	Leakage current		Initial specified value or less				
Bias Humidity Test	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjecting them to the DC rated voltage at 85℃, 85% RH for 2,000 hours.						
	Capacitance change		≤ ± 30% of the initial value				
	D. F. (Tan δ)		≤ 200% of initial specified value				
	ESR		≤ 200% of initial specified value				
	Leakage current		Initial specified value or less				
Appearance		No significant damage					
Resistance to Soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the soldering.						
	Capacitance change		≤ ± 10% of the initial value				
	D. F. (Tan δ)		≤ the initial specified value				
	Leakage current		≤ the initial specified value				

Dimension

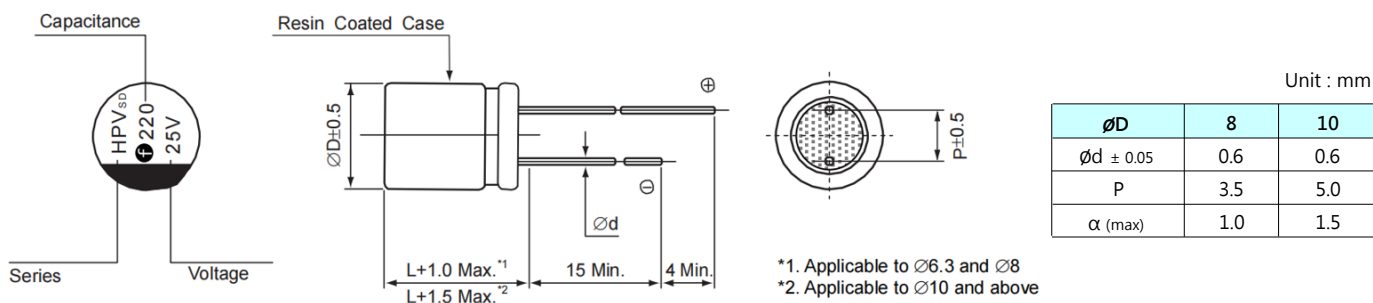

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

■ Part Numbering (example: 330 μ F 25V 10x10mm)

HHPV **331** **M** **1E** **R** **B** **E** **100** **S** **P** **00**
 SERIES CAPACITANCE TOL. W.V. TYPE LEAD DIA. LENGTH PRINTING COLOR RUBBER LEAD PROCESS

■ Standard Products Table

Rated voltage (V.DC)	Rated Capacitance (μ F)	Case Size D x L (mm)	$\tan \delta$	ESR (m Ω max. 20°C/100 KHz)	Rated ripple current (mA rms/105°C, 100KHz)
25 (1E)	150	8 x 9	0.14	27	2,300
	220	8 x 9	0.14	27	2,300
	330	8 x 12	0.14	20	2,500
		10 x 10	0.14	20	2,500
	470	10 x 12	0.14	18	2,800
35 (1V)	100	8 x 9	0.12	27	2,300
	150	8 x 9	0.12	27	2,300
	220	8 x 12	0.12	20	2,500
		10 x 10	0.12	20	2,500
	270	10 x 10	0.12	20	2,500
	330	10 x 12	0.12	18	2,800
50 (1H)	47	8 x 9	0.10	30	1,800
	68	8 x 9	0.10	30	1,800
	100	8 x 12	0.10	28	2,000
		10 x 10	0.10	28	2,000
	120	10 x 12	0.10	25	2,300
63 (1J)	33	8 x 9	0.08	40	1,700
	47	8 x 9	0.08	40	1,700
	56	8 x 12	0.08	30	1,800
		10 x 10	0.08	30	1,800
	68	10 x 10	0.08	30	1,800
	82	10 x 10	0.08	30	1,800
	100	10 x 12	0.08	27	2,000
80 (1K)	22	8 x 9	0.08	45	1,550
	33	8 x 12	0.08	36	1,700
		10 x 10	0.08	36	1,700
	47	10 x 10	0.08	36	1,700
	56	10 x 12	0.08	29	1,900

■ Frequency coefficient of allowable ripple current

Frequency	120 Hz < f < 1 KHz	1 KHz < f < 10 KHz	10 KHz < f < 100 KHz	100 KHz < f < 300 KHz
Coefficient	0.10	0.40	0.70	1.00