

Data Sheet

Customer: _____

Product: Metallized Polyester Film Capacitor (Axial Flat Oval Type) – MEF series

Rated Voltage : 100V, 250V, 400V, 630V

Issued Date: 17-May.-2022

Edition: Ver. 2

Record of change

Date	Ver.	Description	Page
7-Jul.-2016	1		
17-May.-2022	2		2

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969


Prepared by	Checked by	Approved by	Accepted by (customer)
7-Jul.-2016	7-Jul.-2016	7-Jul.-2016	
<i>Andy Hsu</i>	<i>Hwa Wu</i>	<i>Hwa Wu</i>	

Metallized Polyester Film Capacitor (Axial Lead)(Flat Oval)

MEF are non-inductively wound with metallized polyester film as dielectric and electrode with copper-clad steel leads and epoxy end seal.

FEATURES:

- Low dissipation factor (D.F.)
- High insulation resistance.
- High stability of capacitance and dissipation factor versus temperature and frequency.
- Self-healing properties.

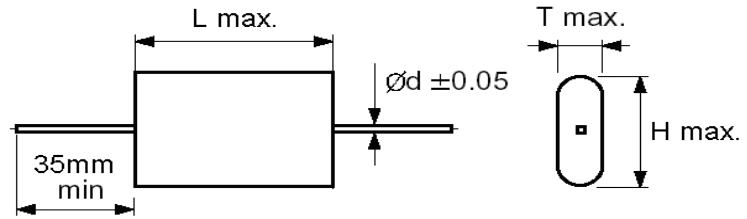

SPECIFICATIONS:

1. OPERATING TEMPERATURE: $-40^{\circ}\text{C} \text{ -- } +85^{\circ}\text{C}$
2. CAPACITANCE RANGE: $0.01\mu\text{F} \text{ -- } 100\mu\text{F}$
3. CAPACITANCE TOLERANCE: $\pm 5\%(\text{J}), \pm 10\%(\text{K})$
4. RATED VOLTAGE: 100VDC, 250VDC, 400VDC, 630VDC
5. DISSIPATION FACTOR: 1.0% max. at 1KHz, 20°C
6. INSULATION RESISTANCE: $>10,000 \text{ M}\Omega(\text{C} \leq 0.33\mu\text{F}), >3,500 \text{ M}\Omega \cdot \mu\text{F}(\text{C} > 0.33\mu\text{F})$.
7. VOLTAGE PROOF: 1.5 times rated voltage.

T	dψ
≤ 8mm	0.6mm
9 – 19mm	0.8mm
≥ 20mm	1.0mm

Unit : mm

RV SIZE CAP(μF)	100V			250V			400V			630V		
	L	H	T	L	H	T	L	H	T	L	H	T
0.01	14.0	8.0	5.0	14.0	8.0	5.0	14.0	8.0	5.0	14.0	8.0	5.0
0.022	14.0	8.5	5.0	14.0	8.5	5.0	14.0	8.5	5.0	14.0	8.5	5.0
0.033	14.0	8.5	5.0	14.0	8.5	5.0	14.0	8.5	5.0	19.0	9.0	5.0
0.047	14.0	8.5	5.0	14.0	8.5	5.0	14.0	8.5	5.0	19.0	9.0	5.0
0.068	14.0	8.5	5.0	14.0	8.5	5.0	19.0	8.5	5.0	19.0	9.0	5.0
0.1	14.0	8.5	5.0	14.0	8.5	5.0	19.0	8.5	5.0	19.0	9.0	5.0
0.22	14.0	8.5	5.0	19.0	11.0	5.0	19.0	11.0	5.0	19.0	11.0	7.0
0.33	14.0	9.0	5.0	19.0	11.0	5.0	19.0	11.0	5.0	25.0	13.0	7.0
0.47	19.0	7.5	5.0	19.0	11.0	7.0	19.0	14.0	7.0	25.0	14.5	8.0
0.68	19.0	13.0	7.0	19.0	13.0	7.0	25.0	13.0	7.0	31.0	14.5	8.0
1.0	19.0	13.0	7.0	25.0	12.0	7.0	25.0	15.0	8.0	31.0	16.5	9.0
2.2	25.0	14.0	8.0	31.0	14.0	8.0	31.0	17.0	10.0	31.0	21.0	15.0
3.3	31.0	14.0	8.0	31.0	17.0	10.0	31.0	19.0	13.0	46.0	21.0	14.0
4.7	31.0	15.5	9.0	31.0	19.0	12.0	31.0	22.0	16.0	46.0	24.0	17.0
5.6	31.0	17.0	10.0	31.0	20.0	14.0	46.0	20.0	13.0	46.0	26.0	19.0
6.8	31.0	18.0	11.0	46.0	18.0	11.0	46.0	21.0	15.0	46.0	27.5	21.0
8.2	31.0	19.0	12.5	46.0	19.0	13.0	46.0	23.0	16.0	46.0	30.0	24.0
10.0	31.0	21.0	14.0	46.0	20.0	14.0	46.0	25.0	18.0	46.0	33.0	26.0
15.0	46.0	20.0	14.0	46.0	24.0	18.0	46.0	30.0	23.0			
22.0	46.0	23.0	17.0	46.0	28.0	22.0	46.0	34.0	29.0			
33.0	46.0	27.0	21.0	56.0	32.0	26.0						
47.0	46.0	32.0	26.0	61.0	35.0	29.0						
68.0	56.0	34.0	28.0	61.0	42.0	36.0						
82.0	61.0	35.0	29.0									