

## Data Sheet

Customer: \_\_\_\_\_

Product: Power Resistor – TR50-H Series \_\_\_\_\_

Size : TO-220 \_\_\_\_\_

Issued Date: 01-Jul.-2025 \_\_\_\_\_

Edition: Ver. 4 \_\_\_\_\_

### Record of change

Date	Ver.	Description	page
30-Nov.-2017	1		
14-Jul.-2023	2	Parameters updated	1~2
05-Dec.-2024	3	Revise Electrical Characteristics Specifications	2
01-Jul.-2025	4	Modify Derating Curve&Dimensions&Part Numbering&Electrical Characteristics Specifications &Environmental Characteristics,Add Power Curve	1~3

## HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1<sup>st</sup> Road, New Taipei Industrial Park,  
New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969

Prepared by	Checked by	Approved by	Accepted by (customer)
01-Jul.-2025	01-Jul.-2025	01-Jul.-2025	
Randy Yu	Michelle Lin	Arthur Su	

## TO-220 Power Resistor

【TR50-H Series】

### ■Features

- 50 watts at 25°C case temperature heat sink mounted
- TO-220 style power package
- Single screw mounting to heat sink
- Molded case for protection and easy to mount
- Electrically isolated case
- Non-Inductive design


### ■Applications

- Gate Resistors in Power Supplies
- Snubbers
- Load and Dumping in Resistors in CRT Monitors
- Automated Machine Controller
- Terminal Resistance in RF Power Amplifiers
- Low Energy Pulse Loading
- UPS
- Voltage Regulation




■Two styles (no round holes and two small round holes) side by side.

### ■Derating Curve

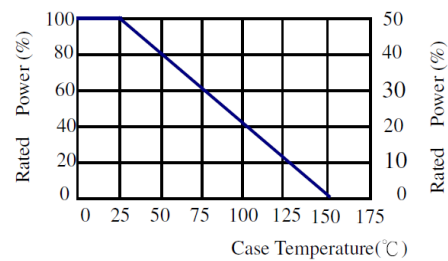


Derating Curve Slope : 0.4W/°K ; Thermal resistance : 3.7°K/W

### ■Construction

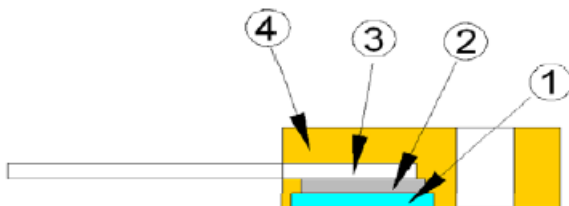

① Alumina Substrate	③ Lead
② Resistor Layer	④ Molding

### ■Dimensions

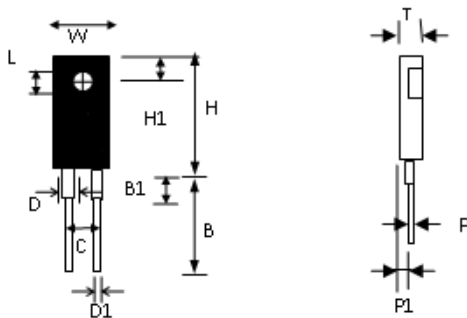

Type	W (mm)	H (mm)	B (mm)	B1 (mm)	C (mm)	D (mm)	D1 (mm)	T (mm)	P (mm)	P1 (mm)	Weight (g) (1000pcs)	Packaging
												Tube
TR50	10.44 ±0.24	16.25 ±0.25	12.70 ±1.3	3.3 ±0.76	5.08 ±0.26	1.27 ±0.13	0.76 ±0.1	3.18 ±0.26	0.55 ±0.1	1.78 ±0.26	1290	50pcs

## TO-220 Power Resistor

【TR50-H Series】

### Part Numbering

TR	50	J	U	D	1001	-H
Product Type	Power	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Resistance	Code
	50: 50 Watts	D: ±0.5% F: ±1% J: ±5% K: ±10%	U: Tube	D: ±50 E: ±100 F: ±200 G: ±300 - : No Specified (±300~±700)	R100: 0.1Ω 0100: 10Ω 4700: 470Ω 1001: 1000Ω 1002: 10000Ω	H: Hole

### Electrical Characteristics Specifications

Type	Item	Resistance Range				TCR (PPM/°C)
		±0.5%	±1%	±5%	±10%	
TR50	-	-	-	0.05Ω - 0.1Ω		No Specified (±300~±700)
	-	-	-	≥ 0.1Ω - 1Ω		±300
	-	-	-	≥ 1Ω - 5Ω		±50 ±100 ±200 ±300
	-	-	-	≥ 5Ω - 10Ω		±50 ±100 ±200 ±300
	-	-	-	≥ 10Ω - 100KΩ		±50 ±100 ±200

- Operating Voltage: 350V Max.
- Dielectric Strength: 2000VAC
- Insulation Resistance: 10GΩ min.
- Operating Temperature Range: -55°C to +150°C

### Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ΔR taken at +105°C
Short Time Overload	ΔR±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	ΔR±1.0%	2,000 hours at rated power
Damp Heat with Load	ΔR±0.5%	40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. coverage	245±5°C for 3 seconds
Thermal Shock	ΔR±0.3%	-65°C ~150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

- Lead Material: Tinned Copper
- Maximum Torque: 0.9N·m
- When in Free Air at 25°C, the TR50-H is Rated for 2.25W.
- The Case Temperature is to be used for the Definition of the Applied Power Limit.
- The Case Temperature Measurement Must be Made with a Thermocouple Contacting the Center of the Component Mounted on the Designed Heat Sink.
- Thermal Grease Should be Applied Properly.
- Storage Temperature: 25±5°C; Humidity: < 75%RH
- Shelf life: 1 years Max

■ **Power Curve**

